


# 96"H x 48"W Vertical Slatwall Panel Handling Instructions


➔ **NOTE:** Prior to opening and assembling the vertical slatwall panels, it is encouraged to wear leather gloves and safety glasses. Two people are recommended for handling.

1. Vertical panels should be flat on the ground.
2. With one person on each end of 96" side, lift the panel up horizontally, and carry to desired location.

 **CAUTION! Do not lift 48" ends upward.**

3. Before tilting upright into the vertical position, place a corner onto a rag or towel to prevent damage.

 **CAUTION! A minimum of two people are needed to support the top half of the panel to prevent panel from tilting forward. Tilting will cause the panel to break into two pieces.**

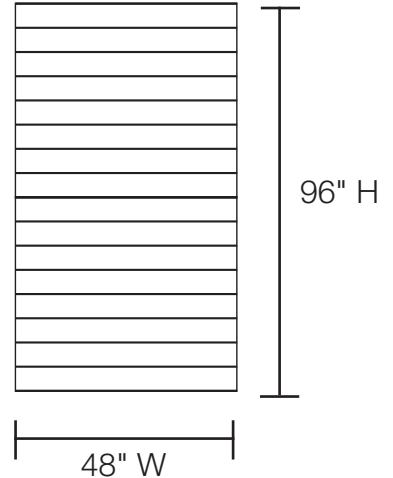

## Recommended Accessories

- Leather gloves
- Safety glasses
- Rag or towel

For more information, call 800.548.7528 to speak with one of our expert Project Managers or visit [www.windmillslatwall.com](http://www.windmillslatwall.com) or [www.garagescape.com](http://www.garagescape.com).



Watch Video of  
Proper Handling

