

Designer Series: Subway Tile

Wind Mill's Subway Tile is functional slatwall featuring custom machining and groove treatments delivering that distinctive subway tile look.

Wind Mill Slatwall Products is the exclusive manufacturer of Anchor™ Core retail display panels.

Strength is equal to beauty; Anchor™ Core is 50% stronger than slatwall made with medium density fiberboard (MDF) core.

For Information and sample request please visit:
www.windmillslatwall.com
or call 800.548.7528 to speak with a Project Manager.

Consult our expert Project Managers for all custom projects.



Designer Series: Subway Tile


- Made with Anchor™ Core
- Customized finishes
- A variety of configurations



Subway Tile Installation Instructions using Wind-Cleat™

1. Determine location where panels will be installed. Use a level to draw a straight line at desired height.
2. When installing over drywall use a stud finder to mark the center of each stud on the pre drawn level line.
3. Attach Wind Mill's Wind-Cleat™ in desired location on wall.
4. Attach Wind Mill's Wind-Cleat™ across the back of Subway Tile panel.
5. Slide the Subway Tile panel onto the Wind-Cleat™

Subway Tile Wind-Cleat™ System

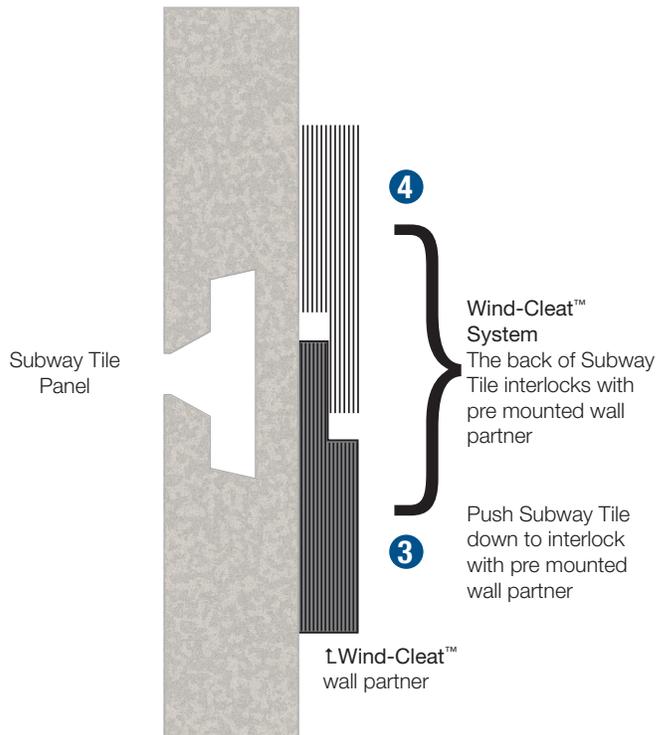

Accessories

Accessories provide the ability to create personalized organization providing a simple way to arrange and rearrange products. Use shelves, baskets, and various hooks to meet your organizational needs.

Necessary Tools

- Safety goggles
- Tape measure
- Stud finder
- Level
- Standard drywall screws
- Drill (screw gun)

Safety First

Use all tools according to the manufacturer's recommendations.

Do's and Don't's

- DO distribute weight equally on the panels.
- DO use tools per manufacturer's recommendations.
- DON'T climb, hang, or step on accessories.
- DON'T overload accessories with additional weight.
- DON'T drop heavy items on accessories.

