

# PVC Series

PVC slatwall is strong and durable. With its lightweight nature, PVC slatwall is easy to handle and install.

PVC Series is water and moisture resistant, making it ideal for a variety of environments, such as outdoor retail kiosks, specialty framed wall fixtures, and garages. Using standard slatwall accessories makes display, organization, and storage easy.

Four foot long sections (12"H x 48"L) weigh only seven pounds and deliver an amazing 70 pounds of breakout strength.


Sections fit together vertically via a panel connection lip for seamless and unlimited stacking. White panels can be custom painted to capture that special look.

For information and sample request please visit: [www.windmillslatwall.com](http://www.windmillslatwall.com) or call 800.548.7528 to speak with a Project Manager.

*Consult our expert Project Managers for all custom projects.*



PVC Series
<ul style="list-style-type: none"> <li>Water and moisture resistant</li> </ul>
<ul style="list-style-type: none"> <li>Seamless stacking</li> </ul>
<ul style="list-style-type: none"> <li>Strong and durable with 70 pound breakout strength</li> </ul>
<ul style="list-style-type: none"> <li>Lightweight; each panel weighs seven pounds</li> </ul>
<ul style="list-style-type: none"> <li>Easy to install</li> </ul>
<ul style="list-style-type: none"> <li>12" high sections; 48" length</li> </ul>
<ul style="list-style-type: none"> <li>White panel and edge treatments can be custom painted</li> </ul>
<ul style="list-style-type: none"> <li>Available in almond, black, gray, and white</li> </ul>




## PVC Panel Installation Instructions

1. Determine location where PVC panels will be installed. Panels need to be mounted to a solid firm surface, such as plywood or drywall. Use a level to draw a straight line at desired height.
2. When installing over drywall use a stud finder to mark the center of each stud on the pre drawn level line.
3. Use correct length screws to attach PVC panel to the wall, screwing through the grooves (see Illustration A below). Due to the uniqueness of each installation, **fastening screws are not included.**
4. If cutting is required, cut wall panels with a power saw. The saw blade should enter the finished side of the wall panels (back side of PVC panel is facing up).


**TIP:** Use a color-matched pan head style screw for best holding and visual results.




**Illustration A →**  
 Install #8 pan head screws through the back of the grooves (**fastening screws are not included**)




Back panel connection lip ↴

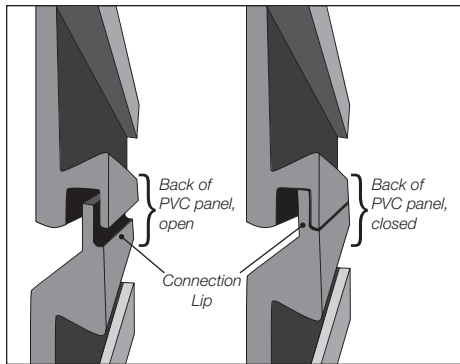


Panel Size

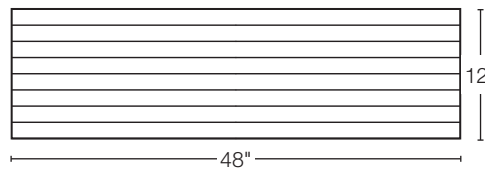

Vertical Installation

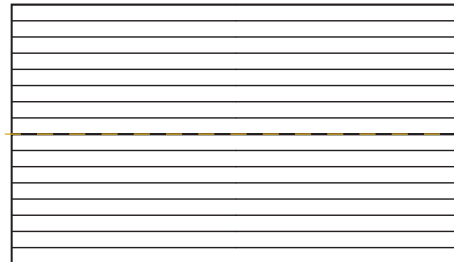

Horizontal Installation

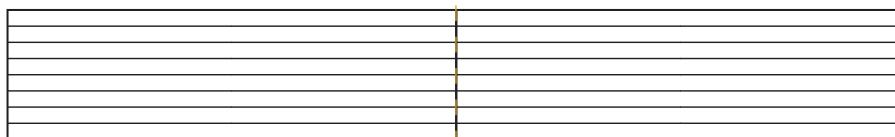

## Accessories

Accessories provide the ability to create personalized organization providing a simple way to arrange and rearrange products. Use shelves, baskets, and various hooks to meet your organizational needs.

## Necessary Tools

- Safety goggles
- Tape measure
- Stud finder
- Level
- #8 pan head sheet metal screws
- Drill (screw gun)

## Safety First

Use all tools according to the manufacturer's recommendations.

## Do's and Don't's

- DO distribute weight equally on the panels.
- DO use tools per manufacturer's recommendations.
- DON'T climb, hang, or step on accessories.
- DON'T overload accessories with additional weight.
- DON'T drop heavy items on accessories.

